

No. 721,359.

PATENTED FEB. 24, 1903.

H. C. DEXTER.
POCKET PROTECTOR.
APPLICATION FILED NOV. 7, 1902.

NO MODEL.

Fig. 1.

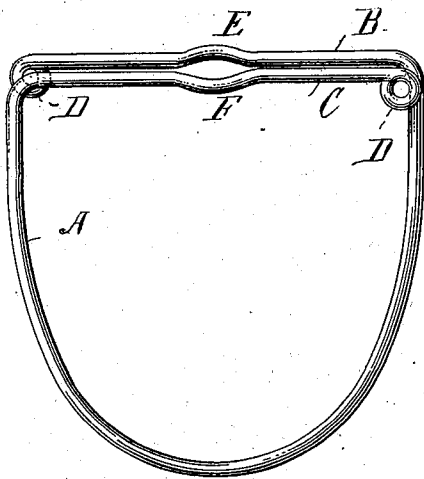


Fig. 2.

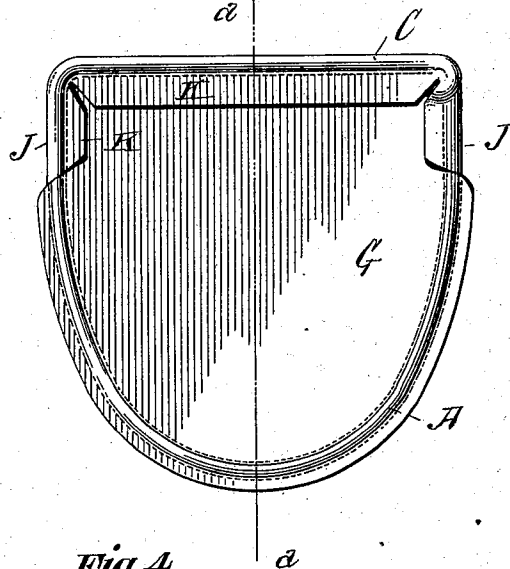


Fig. 3.


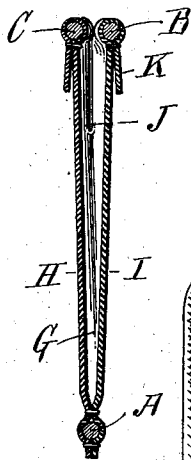


Fig. 4.

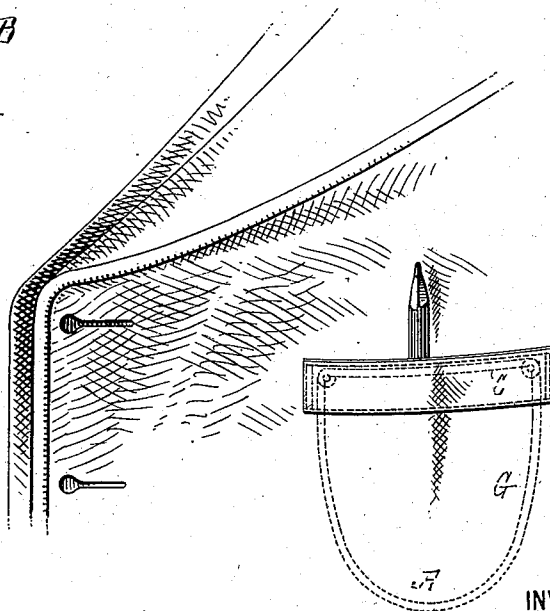

WITNESSES:

Gustave Dietrich
J. A. Van Wart

INVENTOR

Hirman C. Dexter

BY *Lawrence*
his ATTORNEY

UNITED STATES PATENT OFFICE.

HIMAN C. DEXTER, OF NEW YORK, N. Y.

POCKET-PROTECTOR.

SPECIFICATION forming part of Letters Patent No. 721,359, dated February 24, 1903.

Application filed November 7, 1902. Serial No. 130,460. (No model.)

To all whom it may concern:

Be it known that I, HIMAN C. DEXTER, of the city, county, and State of New York, have invented a new and useful Improvement in
5 Pocket-Protectors, of which the following is a specification.

The invention is a pocket-protector constructed to prevent escape of articles contained in a purse, pocket-case, or like recep-
10 tacle.

The invention consists in a spring clip or holder formed integrally of a length of resilient wire having its body portion in the form of a loop and its end portions turned at right
15 angles in opposite directions parallel and in juxtaposition; also, in the combination of said clip or holder with a pocket of flexible material; also, in the construction set forth more particularly in the claims.

In the accompanying drawings, Figure 1 represents the spring clip or holder separately. Fig. 2 represents the said clip combined with a pocket. Fig. 3 is a section on the line *a a*
20 of Fig. 2. Fig. 4 shows the device applied to the pocket of a garment.

Similar letters of reference indicate like parts.

I construct the clip or holder integrally of a piece of spring-wire, Fig. 1, having its body
30 portion bent to form a loop A and its end portions B C turned at right angles in opposite directions and disposed parallel and in juxtaposition. At the extremities of said end portions the wire may be rounded or bent over
35 to form eyes or loops D. The end portions are also preferably provided with bends E F about midway their lengths, which bends come together, as shown in Fig. 1, to form an opening between said end portions.

The clip is placed in a pocket G, of cloth, leather, or any other suitable flexible material. Said pocket may be of any suitable shape. The loop A of the clip is bent to conform to said shape and is preferably secured
40 in the pocket between the parts H I thereof by stitching, as shown in Fig. 2. At the mouth of the pocket are side slits J. The material of the pocket on each side of said slits may be folded outwardly over the wire of the
45 clip and then be secured by stitching, as shown at K. Normally the spring of the wire holds the end portions B C of the clip in close

contact, and thus the mouth of the pocket is kept closed. The slits J in the pocket permit of said end portions B C being moved
55 asunder to open the pocket, and this is facilitated by the introduction of the finger between the bends E F, the moving asunder of the said end portions exerting a torsional strain on the arms of loop A. The object of
60 bending over the extremities D is to prevent wear to the pocket or garment, which might occur if the ends of the wire were left unguarded. The clip besides holding the pocket closed, so as effectually to prevent the escape
65 of articles therefrom, also acts to retain objects placed between its end portions—such as pencils, &c.—as represented in Fig. 4.

The invention is adapted to a great variety of uses, and especially to all sorts of bags and
70 cases, such as wallets, reticules, pocket-books, carriage-boots, mail-pouches, or tobacco, cigar, cigarette, pencil, watch, or spectacle cases. The spring-wire may be applied to the ordinary pocket made in a garment
75 or combined with a wholly-separate pocket which may be subsequently attached to the garment.

I claim—

1. In combination with a pocket of flexible
80 material, a single piece of resilient wire having its body portion in the form of a loop conforming to the shape of said pocket and secured therein; and its end portions turned at right angles in opposite directions and parallel
85 and secured in said pocket on opposite sides of the opening thereof, substantially as described.

2. In combination with a pocket of flexible material having, at its opening, side slits, a
90 single piece of resilient wire having its body portion in the form of a loop conforming to the shape of said pocket and secured therein, and its end portions turned at right angles in opposite directions and parallel; one of said
95 end portions being secured in the material of said pocket on one side of said slits and the other end portion in the material of the pocket on the other side of said slits, substantially as described.

3. In combination with a pocket of flexible material, a single piece of resilient wire having its body portion in the form of a loop conforming to the shape of said pocket and se-
100

5 cured therein, and its end portions turned at right angles in opposite directions and parallel and secured in said pocket on opposite sides of the opening thereof, the said end portions each having an outward bend and the said bends having their concavities facing to form an opening between said end portions, substantially as described.

10 4. In combination with a pocket of flexible material having, at its end opening, side slits, a single piece of resilient wire having its body portion in the form of a loop conforming to the shape of said pocket and secured therein,

and its end portions turned at right angles and in opposite directions and secured in the 15 folded-over material of said pocket on opposite sides of the mouth thereof, substantially as described.

In testimony whereof I have signed my name to this specification in the presence of 20 two subscribing witnesses.

HIMAN C. DEXTER.

Witnesses:

S. B. NEUBURGER,
I. A. VAN WART.